


Specifications

Model	1150	1160	1175	1185	1195
Capacity*	500 bu.	600 bu.	750 bu.	850 bu.	1,000 bu.
Unloading time	300 bu./min	300 bu./min	400 bu./min	400 bu./min	400 bu./min
Hitch, standard	Clevis	Single	Single	Single	Single
Min. H.P. Requirements	130 +	140 +	150 +	180 +	200 +
Approx. empty weight	6,100 lbs.	6,300 lbs.	8,790 lbs.	9,200 lbs.	12,330 lbs.
Est. tongue weight	3,200 lbs.	3,600 lbs.	3,820 lbs.	5,200 lbs.	6,100 lbs.
Auger size	14"	14"	17"	17"	17"
Tires, standard	20.8 x 38 R-1	24.5 x 32 R-3	30.5 x 32 R-3	30.5 x 32 R-3	35.5 x 32 R-3
Spindle diameter	2-7/8"	3-3/4"	3-3/4"	3-3/4"	3-3/4"
PTO yoke, standard	1-3/8" x 21 spline	1-3/8" x 21 spline	1-3/4" x 20 spline	1-3/4" x 20 spline	1-3/4" x 20 spline

Model	1150	1160	1175	1185	1195
A	11'	11'6"	12'4"	12'8"	12'6"
B	9'8"	10'2"	10'10"	11'1"	11'6"
C	11'10"	11'10"	11'11"	11'11"	11'11"
D	10'	10'	10'	10'	11'4"
E	13'9"	13'9"	15'3"	15'3"	18'3"
F	11'9"	12'1"	12'4"	12'7"	12'10"
G	7'3"	7'3"	7'6"	7'6"	7'11"
H	13'2"	13'2"	14'6"	14'7"	14'11"
I	1'6"	1'6"	1'7"	1'6"	1'4"
J	1'8"	1'8"	1'8"	1'8"	1'4"
K	19'5"	19'5"	24'6"	24'6"	27'7"
L	13'9"	13'9"	16'	16'	21'6"

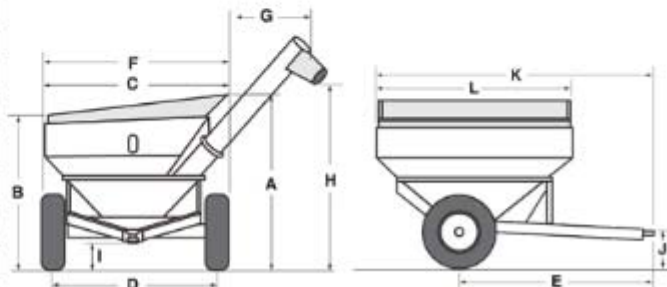

*Capacities measured with #2 corn @ 15% moisture (56 lb. test weight)